

HIVE 4

Rev 1.0 · Sep 2026

Compact 4-Bay RTX Charger

The Hive 4 charges up to four RTX or RTX GO devices at once. Compact and lightweight, it sits neatly on a desktop and travels well for portable and on-the-go deployments.

Each bay has a built-in USB-C connector — place a device in the bay and charging starts. Powered from a single USB-C input, it needs no software, setup or configuration.



CHARGING & POWER

Charging bays	4 × USB-C	Input	5 VDC, 2.5 A via USB-C
Output per bay	5 VDC, 500 mA	Power supply	Not included. Use a safety-approved IEC/EN 60950-1 or IEC/EN 62368-1 adapter rated 5 VDC and certified as a Limited Power Source (LPS)
Data	None — charging only, no data transfer		


REGULATORY

EU / UK	CE; UKCA	Japan / Australia / NZ	PSE; RCM
USA / Canada	FCC Part 15 Class B; ISED	Environmental	RoHS, REACH, WEEE

PHYSICAL & IN THE BOX

Dimensions	152 × 80 × 35 mm	Supplied	Hive 4 charger; USB-C charging cable
Weight	108 g (0.24 lbs); shipping 191 g (0.42 lbs)	Required	USB-C power adapter, 5 VDC / 2.5 A — not included
Colors	Light gray	Compatible devices	RTX and RTX GO
Operating temp.	−12 °C to +40 °C (10.4 °F to 104 °F)		

DIMENSIONS

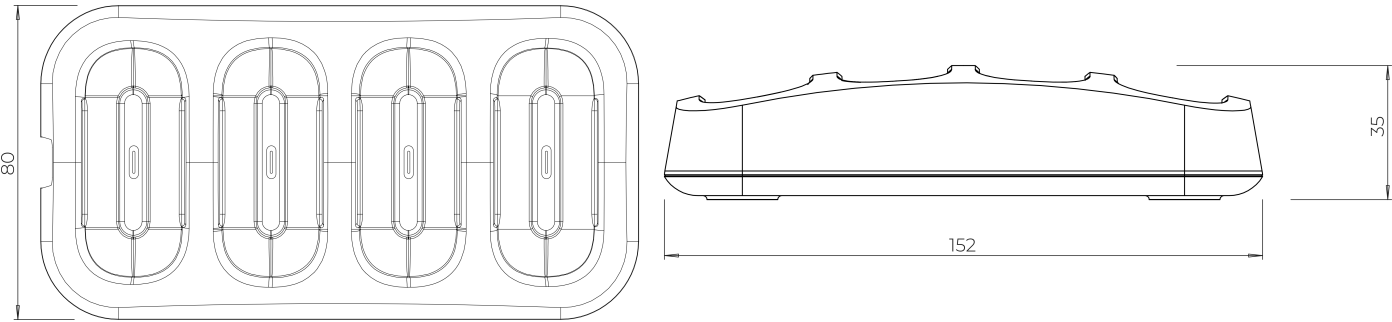

All dimensions in millimetres.

